

FIG. 1

10023094.1

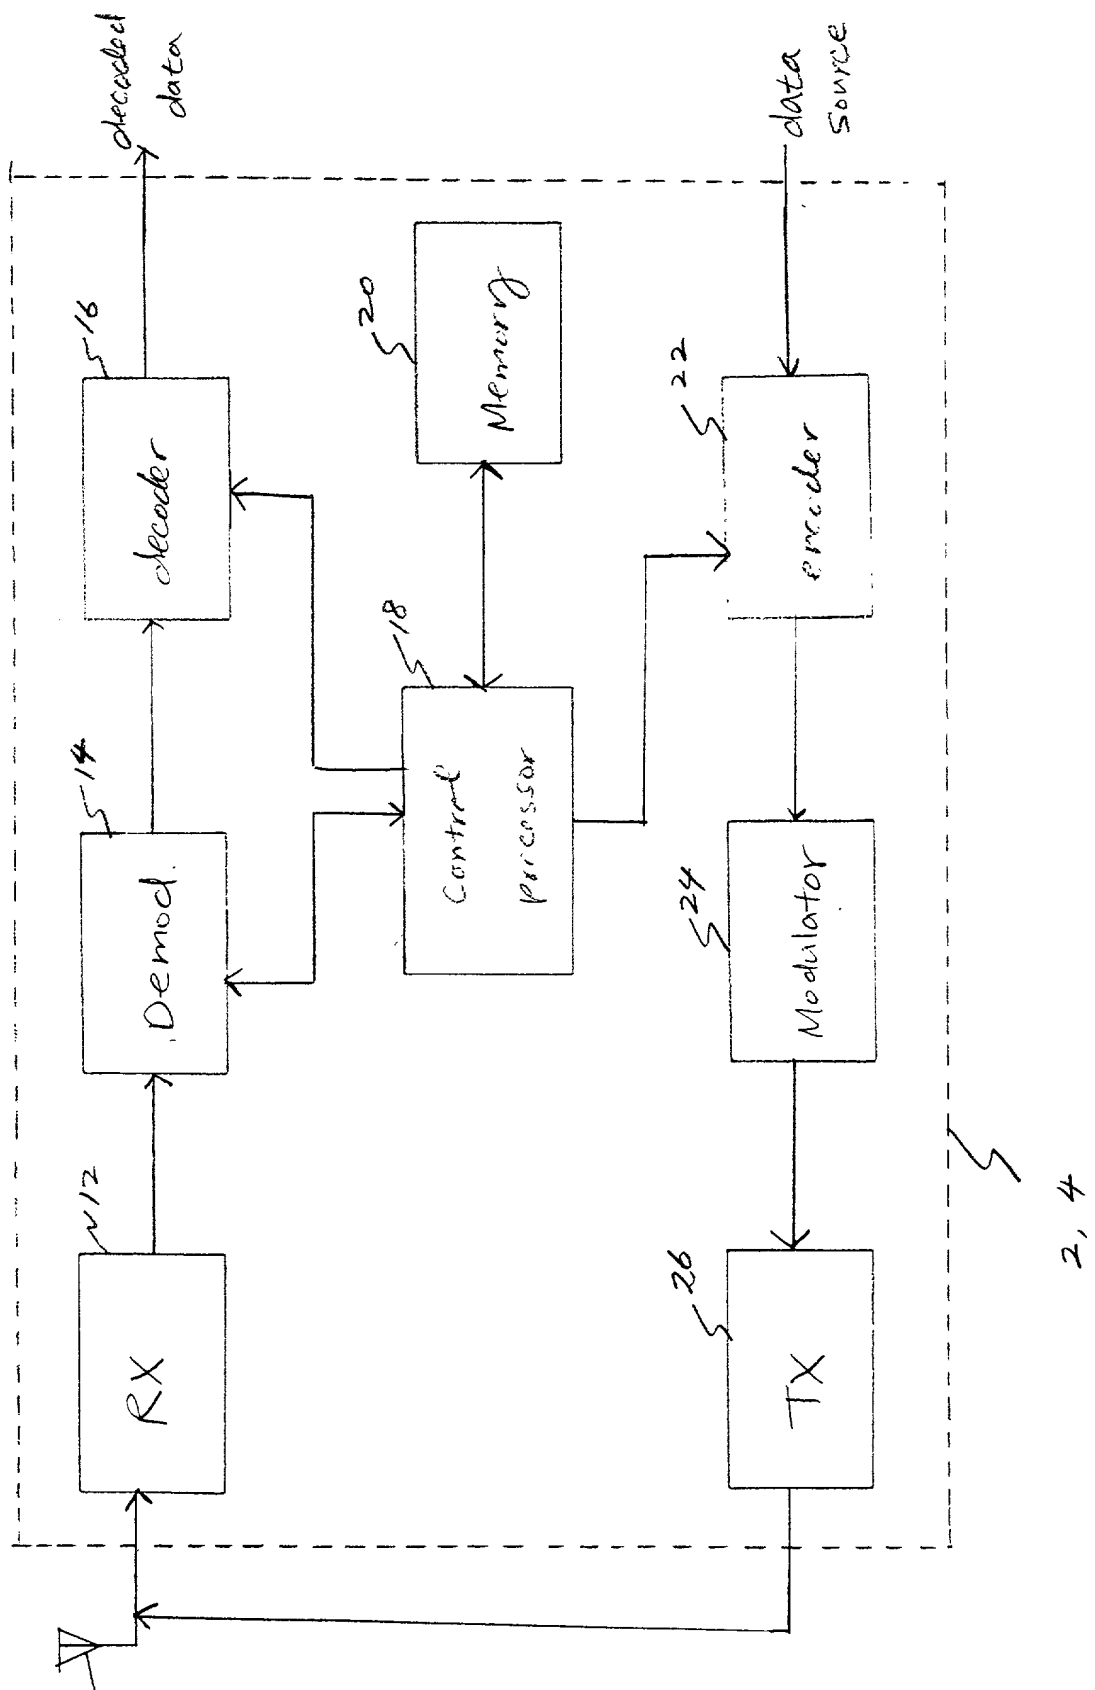


FIG. 2

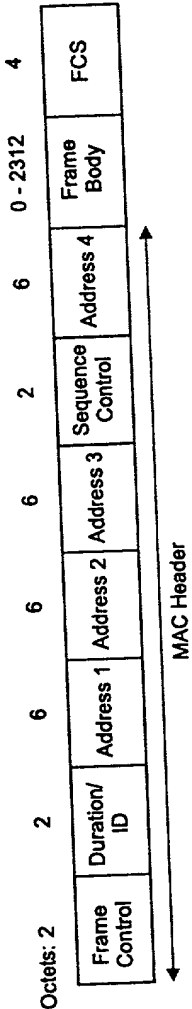


FIG. 3

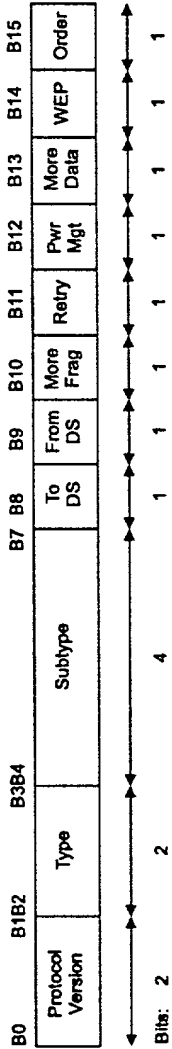


FIG. 4

Connection Situation	To DS (frame control B8)	From DS (frame control B9)	Address combination
STA->AP	1	0	Address 2(SA) + Address 3 (DA)
AP->STA	0	1	Address 1(DA) + Address 3 (SA)
AP->AP	1	1	Address 3 (DA) + Address 4 (SA)
STA->STA	0	0	Address 1(RA) + Address 2 (TA)

FIG. 5

Inventor: XUEMEI OUYANG ET AL

Attorney Docket: US 010665

Title: TIME DIVERSITY COMBINING TO INCREASE THE RELIABILITY OF THE IEEE 802.11 WLAN RECEIVER

Contact: Russell Gross (914) 333-9631

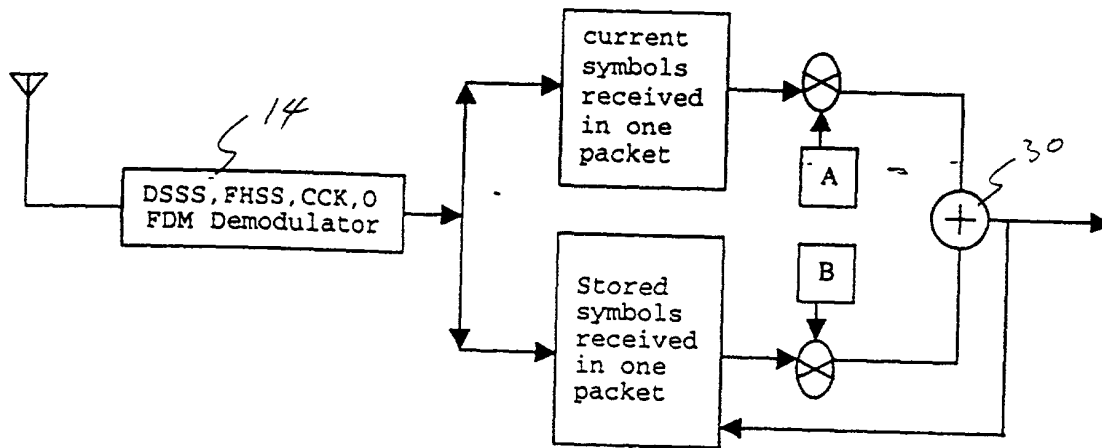


FIG. 6

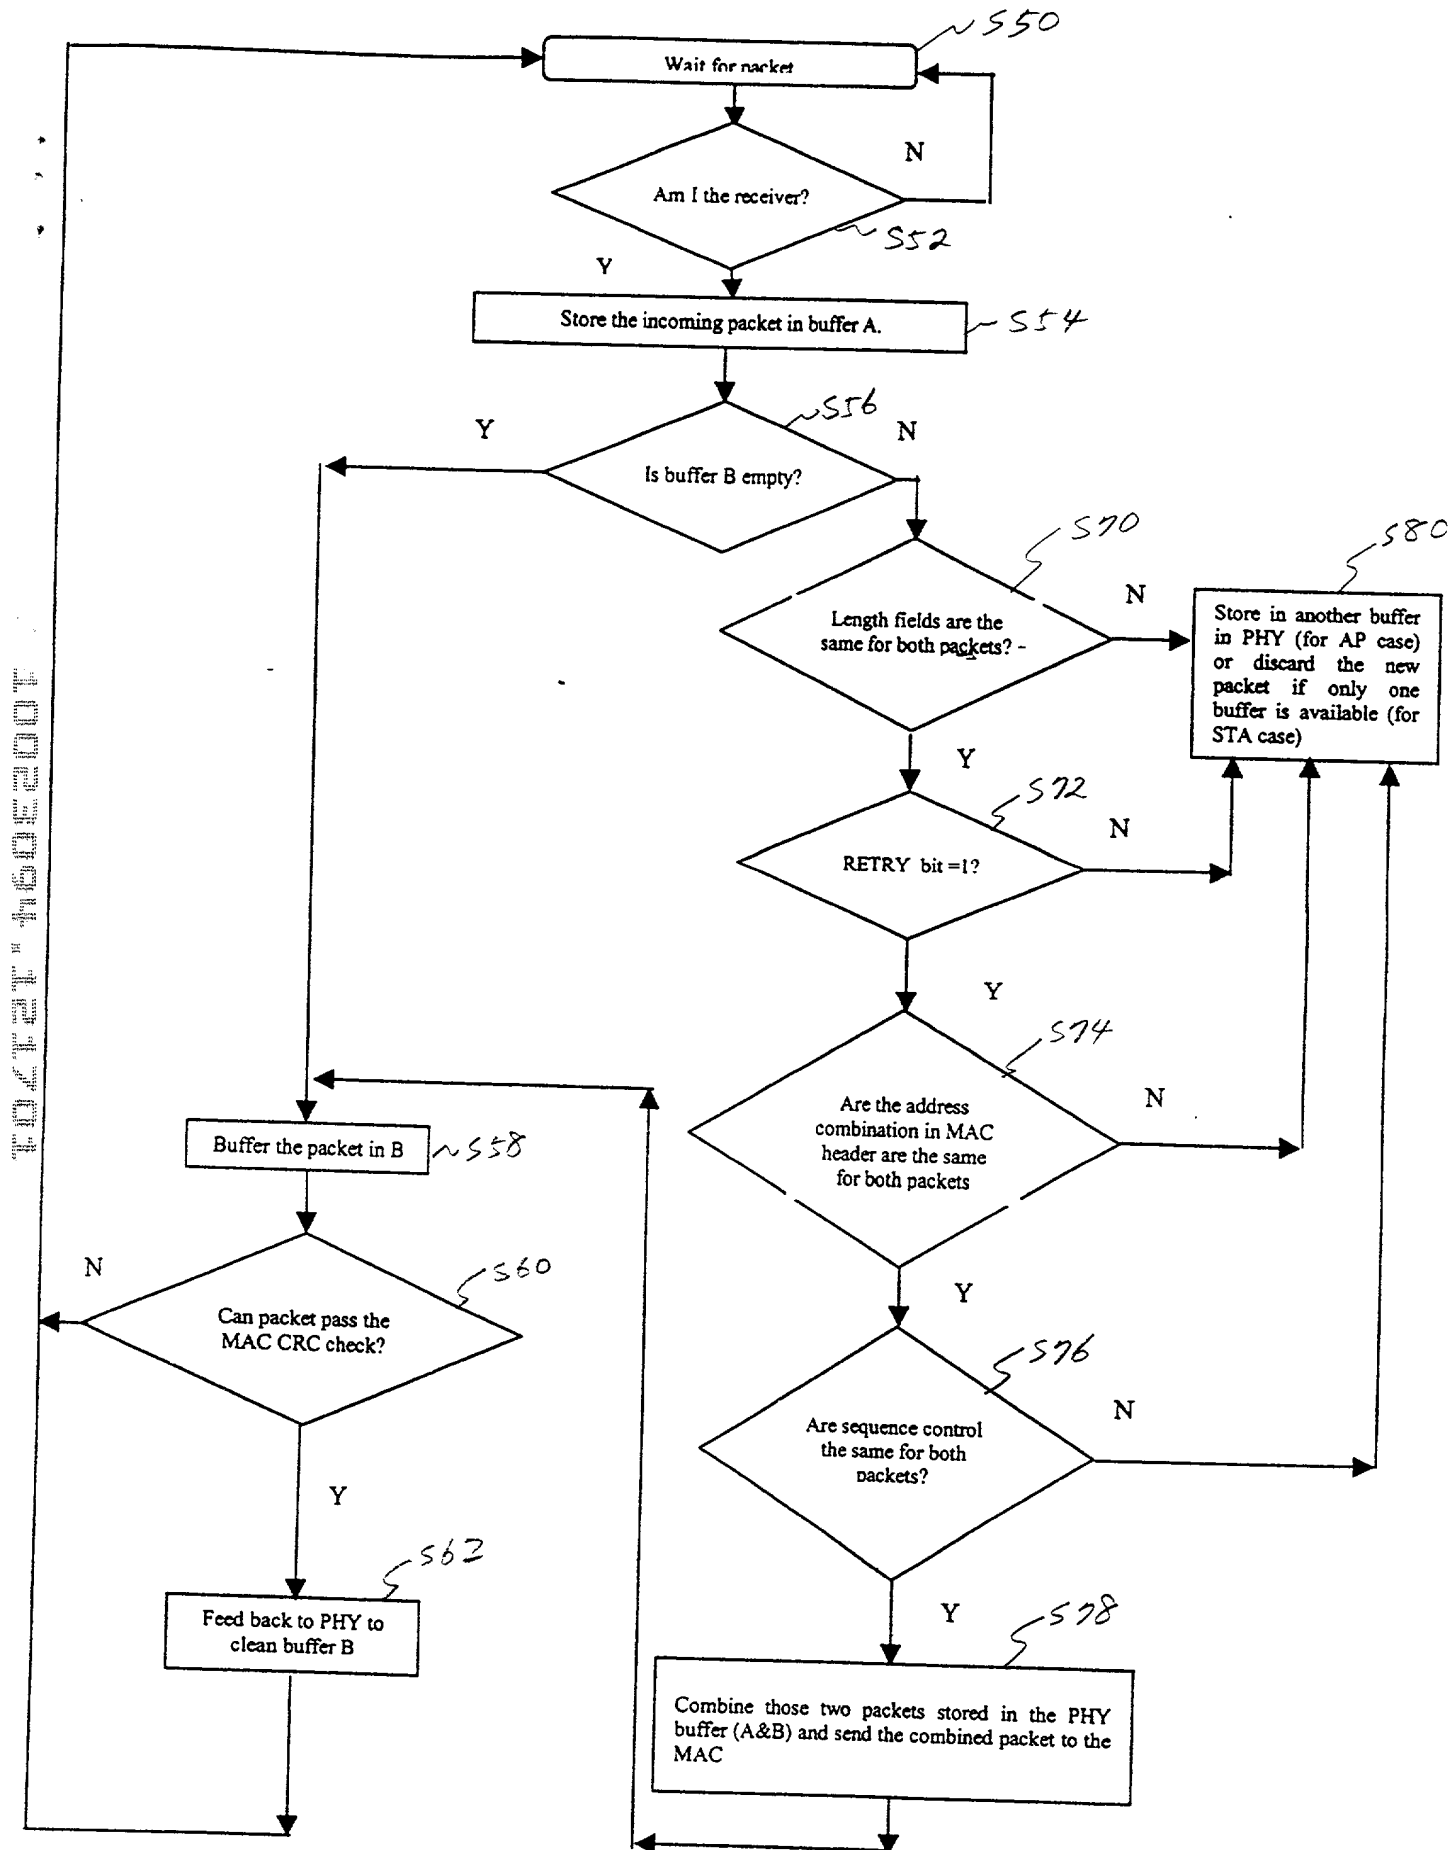


FIG. 7